


TD-9565S4-C

6MP Dual Illumination Water-proof
Turret Network Camera



- H.265+ /H.265 /H.264+ /H.264/MJPEG coding
- Max. resolution: 6MP (3200 × 1800)
- Auto day/night switch
- 3D DNR, HWDR, HLC, BLC, etc.
- ROI coding
- Support smart supplement light
- 30~40m white light view distance; 30~50m IR view distance
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- Support remote monitoring by smart phones& tablet PCs with iOS and Android OS
- Support NAT function
- Support SMD
- Support line crossing detection, region intrusion detection, abandoned/missing object detection, video exception detection
- Dual-system backup

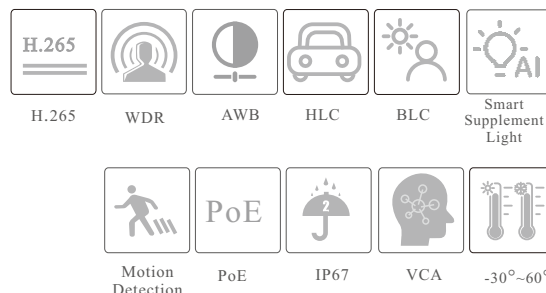

en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn

SPECIFICATIONS


Specifications	Model	TD-9565S4-C
Camera		
Image Sensor	1 / 2.5 "CMOS	
Image Size	3200×1800	
Electronic Shutter	1 / 4 s ~ 1 / 100000 s	
Iris Type	Fixed Iris	
Min. Illumination	0.008 lux @F1.6, AGC ON; 0 lux with illumination on	
Lens	2.8~12mm@F1.6,	
Field of View	Horizontal: 108°~36°; Vertical: 57°~20°; Diagonal: 129°~42°	
Focus	Motorized	
Lens Mount	Φ14	
Day&Night	ICR	
Wide Dynamic Range	120dB	
BLC	Yes	
HLC	Yes	
Digital NR	Yes	
S/N Ratio	≥50dB	
Angle Adjustment	Pan: 0°~360°; Tilt:0°~80°;Rotation: 0°~360°	
Image		
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub /Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG	
H.265 Compression Standard	Main Profile@Leve4.1 High Tier	
Resolution	6MP (3200×1800), 4MP(2688×1520), 2K(2560×1440), 1080P(1920×1080), 720P(1280×720), D1, VGA (640×480), 480×240, CIF	
Main Stream	6MP(1~20fps)/4MP/2K/1080P (60Hz: 1~30fps; 50Hz: 1~25fps)	
Sub Stream	1080P (60Hz:1~15fps; 50Hz:1~12fps)/720P/D1/VGA/480×240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)	
Third Stream	D1/480×240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)	
Bit Rate	64 Kbps ~8Mbps	
Bit Rate Type	VBR / CBR	
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser	
Audio Compression	G711A/U	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ45 (10/100 Base-T)	
Video Output	No	
Audio	1CH audio input; 1CH built-in MIC	
Storage	Built-in micro SD card slot, up to 256GB	
Reset	Yes	
Functions		
Remote Monitoring	Web browser /NVR/NVMS/Mobile APP	
Web Browser	Chrome 105.0+/Edge 105.0+/Firefox 121.0+/Safari 14.0+	
Online Connection	Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, NAT, QoS	
Interface Protocol	ONVIF	
API&SDK	Yes	
Storage	Network remote storage; micro SD card storage	
Smart Alarm	Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, video exception	
Intelligent Video Detection (IVD)	Line crossing/region intrusion (human/vehicle classification), abandoned/missing object detection	
General Function	Watermark, IP address filtering, video mask, heartbeat, ANR, cloud upgrade, smart supplement light, corridor pattern, disarming	
PoE	Yes (IEEE802.3af)	
Supplement Light Range	IR range: 30 ~ 50 m; white light range:30 ~ 40 m	
Ingress Protection	IP67	
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API	

*When HWDR function is enabled, the main/sub/third stream supports up to 20fps (except for the 1080P sub stream).

DORI Distance

Lens	Detect	Observe	Recognize	Identify
2.8~12mm(W)	66m(218ft)	27m(87ft)	13m(44ft)	7m(23ft)
2.8~12mm(T)	204m(669ft)	82m(269ft)	41m(135ft)	20m(66ft)
Others				
Power Supply	DC12V/PoE			
Power Consumption	DC12V: < 7.6W; PoE: < 9.2W			
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)			
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)			
Dimensions (mm)	Φ 111.6 × 99.6			
Weight (net)	Approx. 0.66KG			
Material	Aluminum alloy body			
Installation	Ceiling mounting; wall mounting			
Certificate	CE, FCC			
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), and REACH(EC1907/2006)			

DIMENSIONS

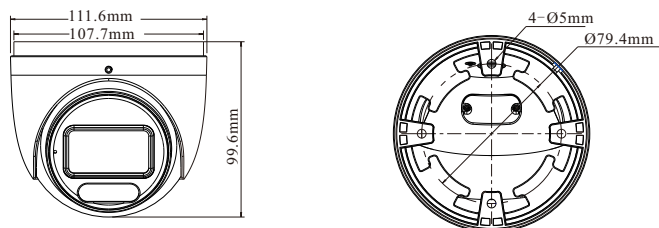

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	TD-9565S4-C(D/AZ/PE/AW3)	Motorized lens
-----------------	--------------------------	----------------